

MONTAJES CONSERVEROS DE GALICIA

MCG

Round Can Seamers

R-430



NEW

**1 SINGLE OPERATOR
2 MACHINES**

Ends feeding from both sides.

NEW

**MAXIMUM
FLEXIBILITY**

diameters 50-160mm.




Characteristics

Technical Data:

| | |
|--------------------|----------------------------------|
| Diameter min-max | 50-160 mm |
| Height min-max | 25-150 mm (others under request) |
| Seaming Stations | 4 |
| Capacity max | 300 cpm |
| Tooling changeover | 2-3 hours |
| Height changeover | 5-10 minutes |

Measures & Consumptions:

| | |
|------------|--------------------------------|
| Dimensions | 2.800 x 1.400 x 2.200 mm |
| Volume | 8,5 m ³ |
| Weight | 2.200 Kg |
| Motor | 5,5 CV |
| Air | 80 l/h at 6 Kg/cm ³ |

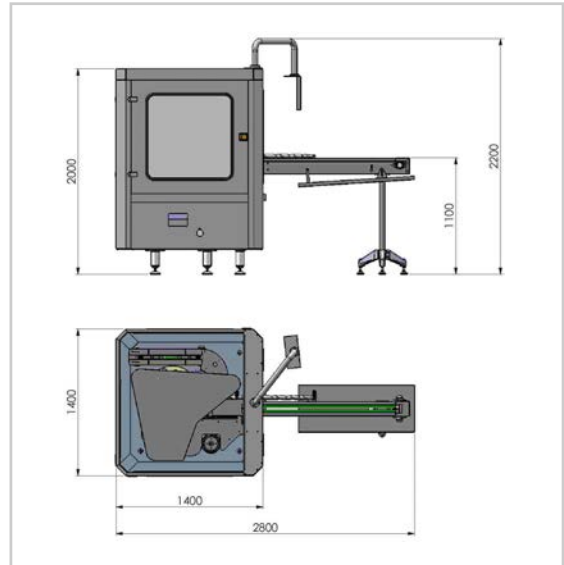

DESCRIPTION

Automatic cans feeding with synchronisation timing-screw.
 Ends feeding from both sides: right and left, allowing 1 single operator to handle 2 machines (NEW).
 Seaming pulley with 4 spindles & ends feeding system fixed to the upper frame and supported by 3 elevation pillars to achieve bigger stability, seaming capacity and consistency.
 Height change by moving all upper frame.
 Seaming technology with progressive seam system.
 2 watertight seaming rolls from AISI 440C: 1st oper. (one) and 2nd oper. (one) for each station.
 Exit motorized conveyor.
 Safety systems, electronic frequency speed variator and programmable PLC.
 Hygienic and Safety guards of Inox according to CE rules.



OPTIONS

Ends marker by ink injector, model to be determined.
Automatic elevation of seaming pulley & ends feeding system.
Steam or gas injection device.
 Coupling & Synchronisation with liquid Fillers.